

# K-SPS

## [Sequential Power Switcher]

귀사의 시네마에 최고의 전원제어 시스템 K-SPS를 소개합니다.

K-SPS는 기존 영화관 관리에서 혁신적인 변화를 제공하여 고객사로 하여금 완전하고 안정적인 자동화 시스템을 제공하여 불필요한 인력소모를 줄이고 안정적인 시네마 운영환경을 제공합니다.

K-SPS는 안정적인 영상/음향장비의 운영을 위해 설계되었으며, 국내 주요 프랜차이즈 CGV, 메가박스의 전원제어 시스템 시장을 선도하고 있습니다.



## Top Features

안전성 및 내구성을 최우선적으로 고려한 설계


- » 과전압, 과전류 등 전기 문제의 안정을 위한 대용량 노이즈필터 설계
- » 장비에 문제가 생겨도 BYPASS를 통해 어떤 상황에도 안정적인 전원공급 가능

최적의 영상/음향 환경 구축을 위한 설계

- » 대용량 노이즈필터를 통한 전기 공급을 통해 영상/음향 노이즈 최소화
- » 전원 공급 채널 별 시차 설정으로 장비 맞춤형 전원공급 가능

스마트한 시네마 시스템 운영을 위한 설계

- » DOLBY, AMX, JNIOIR 등 서버 및 오토메이션 장비와 완벽호환으로 통합제어환경 제공
- » 최대 8개관 음향/영상 동시 모니터링으로 중앙관리식 멀티플렉스 시네마 시스템 운영
- » 로그 기능을 통한 지속적인 모니터링 운영이 가능

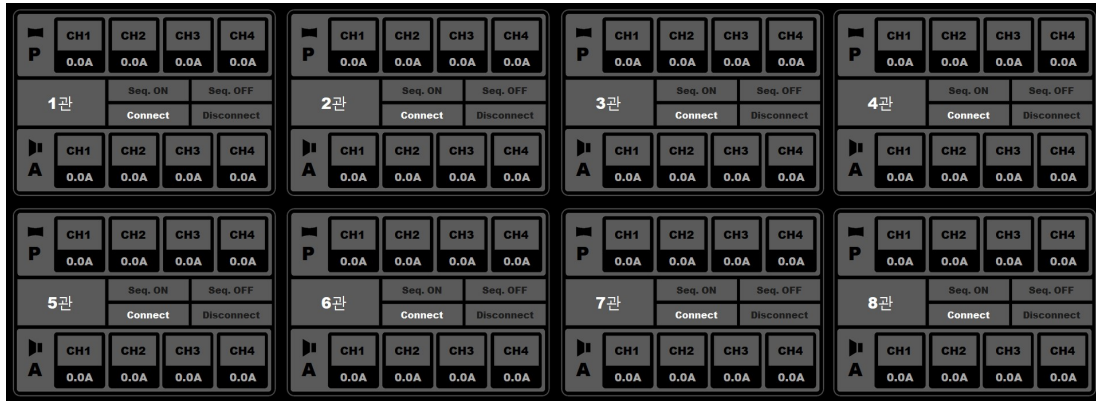

## Key Specifications

Channel	4CH
CH Load	220V 30A
Total Load	220V 50A
AC Noise Filter	단상 250V 50A 고감쇄형
Connector	Terninal Block (3P/L,N,G)
CH 1>2 Interval	(0~5)x60sec + (0~5)x10sec 0sec인 경우 CH 2>3 / 3>4 Interval 사용
CH 2>3 / 3>4 Interval	0~9sec
Manual Control	Sequential On/Off Switch
Remote Control	Data(Ethernet), GPI(On&Off)
Control Power	15W
Main Voltage	AC 220V 50/60Hz 단상, 3-Wire(L,N,G)
Dimension	482(W) x 132.5(H) x 350(D) mm
Weight	10Kg



KINOTON KOREA, INC.

Kinoton Building, 12,  
Yangjaecheon-ro 3-gil,  
Seocho-gu, Seoul, Korea  
TEL +82 2-6923-1900  
FAX +82 2-518-1921  
<http://www.kinoton.co.kr>