

# DPH104

Ref. DPH104


**4K image processor for Analog Way LivePremier™ presentation systems and Picturall media servers. Easily drive four independent Full HD displays from one single 4K60 signal**




## Presentation

DPH104 is a high-performance latency-free 4K image processor able to convert one 4K DisplayPort output from a **LivePremier™ presentation system** or a **Picturall media server** to four independent 1080p HDMI outputs. All the outputs on the DPH104 can be used with native resolution just like they were directly connected to the source system. DPH104 does not require software or configuration, and guarantee an easy and trouble-free installation experience. DPH104 is a perfect fit for numerous video wall and soft-edge blending applications. You can use multiple DPH104 devices to easily create even larger display solutions.

### Example 1: one 8K x 1K@60Hz input to four 1080p LED wall processors

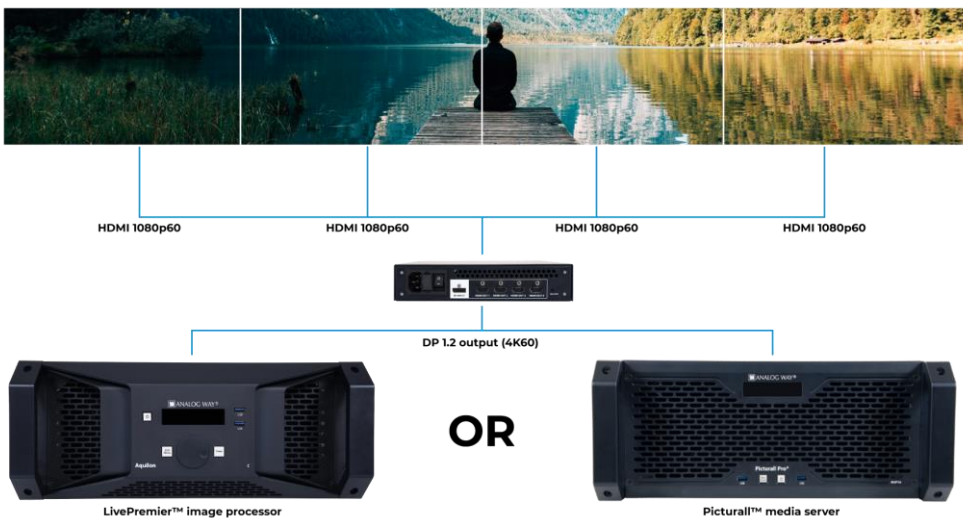


### Example 2: one 8K x 1K@60Hz input to four 1080p projectors (\*)

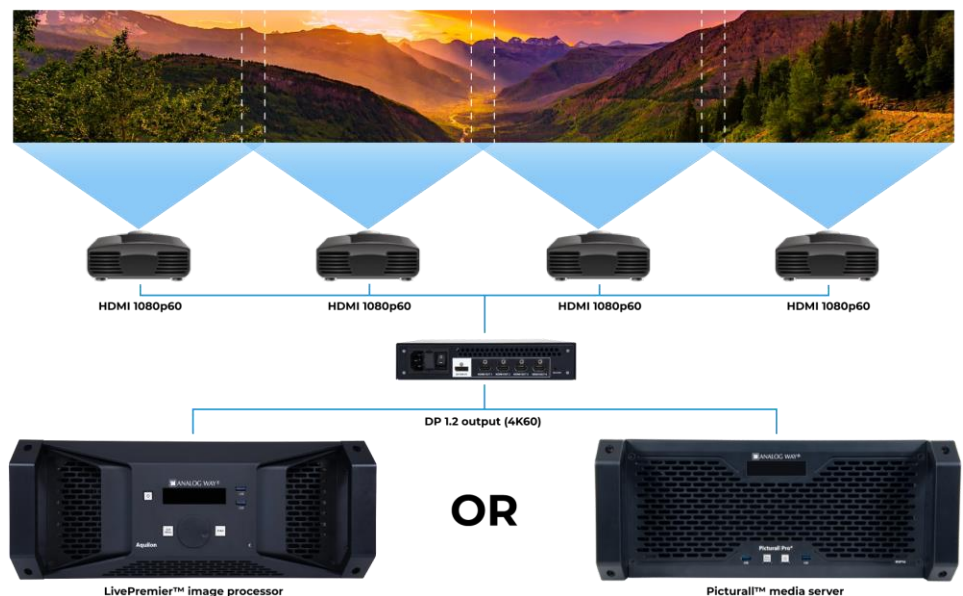

(\*) soft-edge curve adjustments to be achieved with the projectors

## Example 3: one 8K x 1K@60Hz input (with different contents) to four different screens

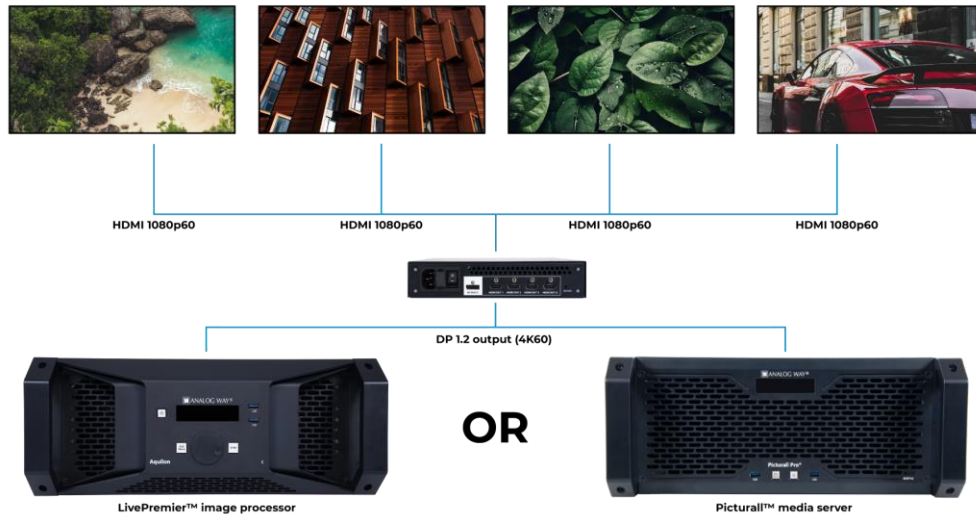

### Key Features

- Compatible with the LivePremier and Picturall series
- Ruggedized metal housing (1RU half rack)
- One DisplayPort input, four HDMI outputs
- HDCP 2.2 and 1.4 support on input and outputs
- Zero latency processing
- No software, no configuration
- Splicer mode: convert one 8Kx1K input to four full HD outputs
- Splitter mode: distribute one full HD input to four full HD outputs or one 4K UHD input to four 4K UHD outputs
- OSD status for easy system troubleshooting
- HDR compliant
- Multichannel audio pass-through
- Status LEDs for easy troubleshooting
- Mounting kit included to accommodate one or two DPH104 devices in one rack space
- Half-rack blanking plate included for unused space

#### Dimension (in Rack Units - RU)

- ▶ 1RU

#### Dimensions

- ▶ W 8.64" x H 1.73" x D 7.81"
- ▶ L 219.5 mm x H 44 mm x P 198.5 mm

#### Weight without accessories

- ▶ 1.7 kg / 3.75 lbs

#### Operating conditions

- ▶ Temperature: 0 to 40°C (32 to 104°F)
- ▶ Humidity: 10% to 80%, non-condensing

#### Noise (@1,6m height @25°C)

- ▶ Front: 35 DBa@1m
- ▶ Rear: 35 DBa@1m

#### Thermal dissipation

- ▶ 102 BTU/hr

#### Warranty

- ▶ 3-year warranty on parts and labor back to factory

#### Power supply

- ▶ 100-240 VAC 50/60Hz 2.2A
- ▶ Fuse cartridge T2,5A 250VAC 5x20mm
- ▶ Max consumption: 30 W

#### Safety Compliance

- ▶ IEC/UL/EN 62368-1
- ▶ CSA22.2#62368-1
- ▶ (UL Listed E359143)

#### EMC & Environmental Compliance

- ▶ EN55032, EB55024, EN61000, FCC part15, ICES

#### Supplied with

- ▶ 1 x Power supply cord
- ▶ 1 x Rackmount kit
- ▶ 1 x Quick start guide including safety instructions

### Technical Specifications

#### INPUT

- 1x DisplayPort 1.2

#### OUTPUTS

- 4x HDMI 2.0

#### SLICER MODE

- 1x 7680x1080 (Analog Way custom timing) to 4x 1920x1080

Supported rates: 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

- Or 1x 7680x1200 (Analog Way custom timing) to 4x 1920x1200

Supported rates: 50Hz, 59.94Hz and 60Hz

- Or 1x 3840x2160 (Analog Way custom timing) to 2x 1920x2160

Supported rates: 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

Supported chroma subsampling: 4:4:4, 4:2:2 and 4:2:0

Supported color depth: 8 bit and 10 bit

#### SPLITTER MODE

- 1x 1920x1080 to 4x 1920x1080

- Or 1x 3840x2160 vers 4x 3840x2160

Supported rates: 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

Supported chroma subsampling: 4:4:4, 4:2:2 and 4:2:0

Supported color depth: 8 /10 bits (for 3840x2160 resolution: 10 bits at 60Hz supported with 4:2:2 or 4:2:0 chroma subsampling only)

#### PROCESSING

BT.709 and BT.2020 color spaces support

HDR compliant with HDR10 and HLG

Compatible with HDCP 1.4 and HDCP 2.2

#### AUDIO

Multichannel audio pass-through (PCM, up to 8 channels)

#### OTHER FEATURES

Firmware updates supported via USB

Front panel status LEDs (system, HDCP, input and output signal)

Output signal status can be displayed on each output (OSD) for easy troubleshooting

Specifications subject to change without prior notice

DPH104\_EN-15/01/2020